


INT-1.5-2019
MOUNTING MANUAL

FritsJurgens®


SYSTEM ONE

COMPONENTS SYSTEM ONE

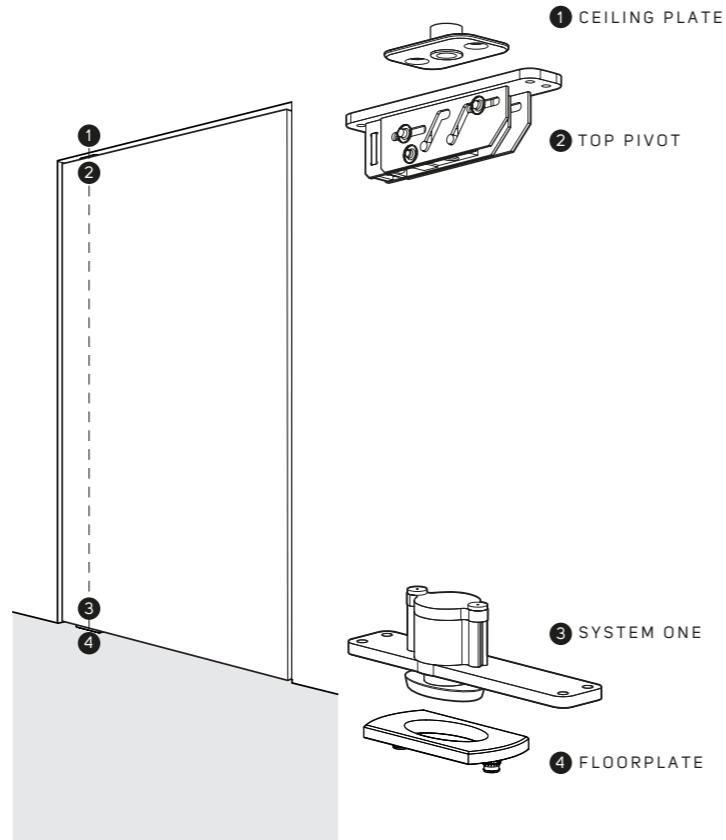


GAPS AROUND THE DOOR

TOP SEAM
MIN. 4MM
MAX. 10MM

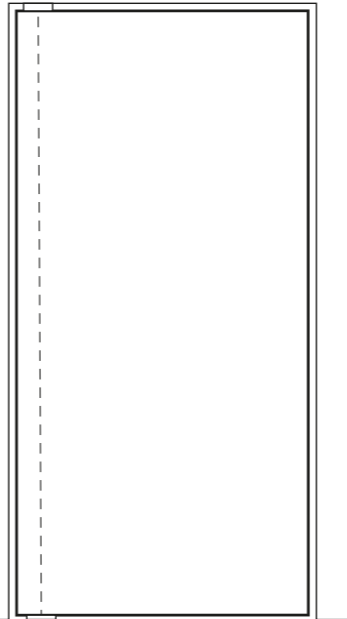


BOTTOM SEAM
=11MM


MOUNTING KIT




1 2 3 FITTING TEMPLATE




4 6 FITTING ADHESIVE



6 TORX BIT TX20, SCREWS (4X50)

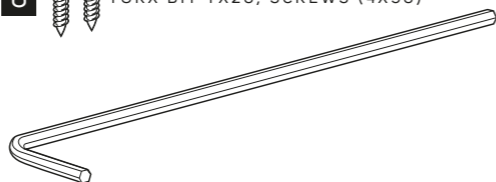

8 A ALLEN WRENCH

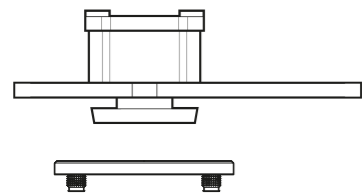


FRITSJURGENS®
+31 598 343 410
INFO@FRITSJURGENS.COM
WWW.FRITSJURGENS.COM



← ALSO CONSULT THE
ONLINE MANUAL


GAP CALCULATOR

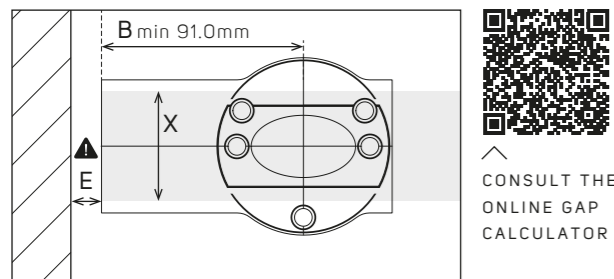

B	40	50	60	70	80	90	100	X
91	4	5	7	9	10	12	15	
250	3	3	4	4	5	6	7	
500	2	3	3	3	4	4	5	
1000	2	2	3	3	3	3	3	
1500	2	2	2	2	2	3	3	
2000	2	2	2	2	2	2	3	


E MINIMUM GAP BETWEEN DOOR AND WALL (IN MM)
B DISTANCE PIVOT POINT TO BEGINING EDGE OF DOOR (IN MM)
X DOOR THICKNESS (IN MM)

1 MOUNT THE FLOORPLATE

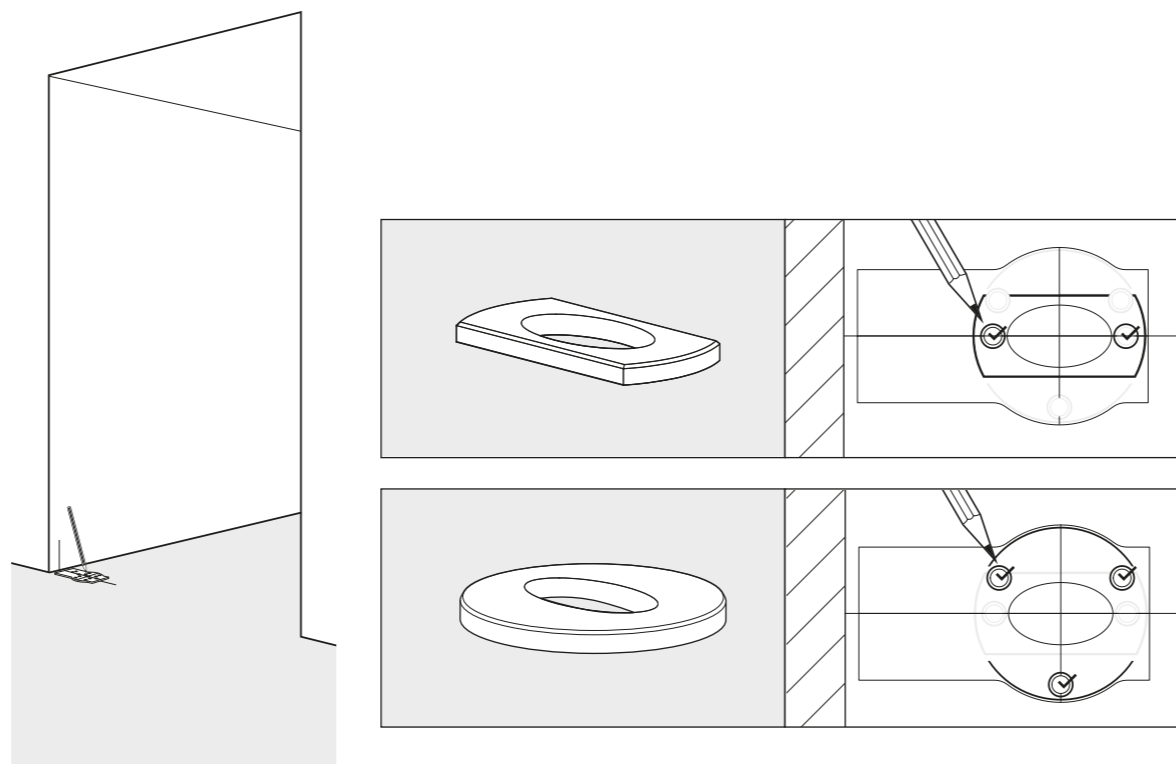


2


FritsJurgens®
INT-1.5-2019

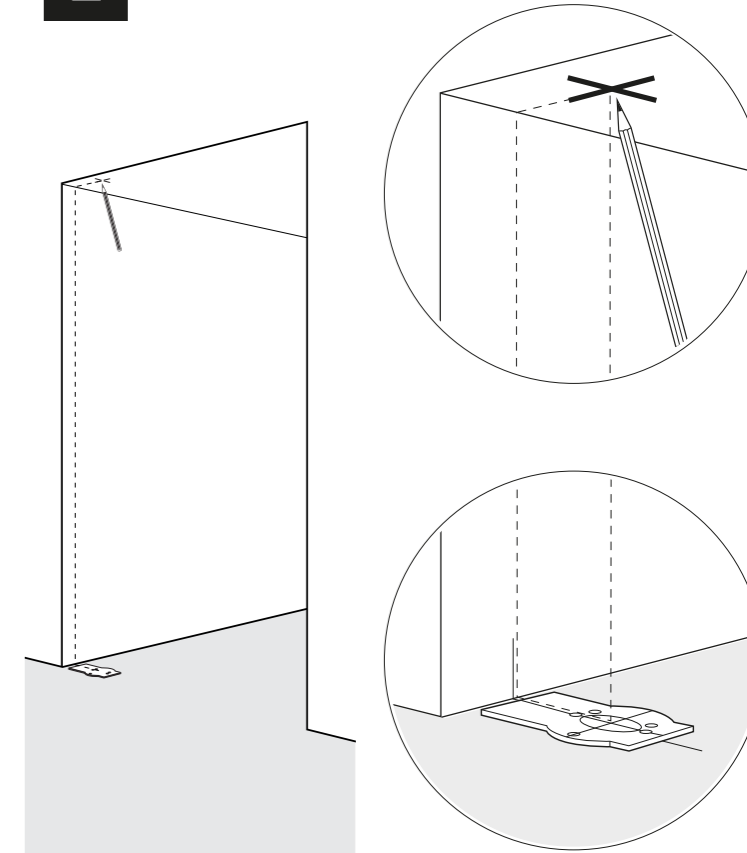


3

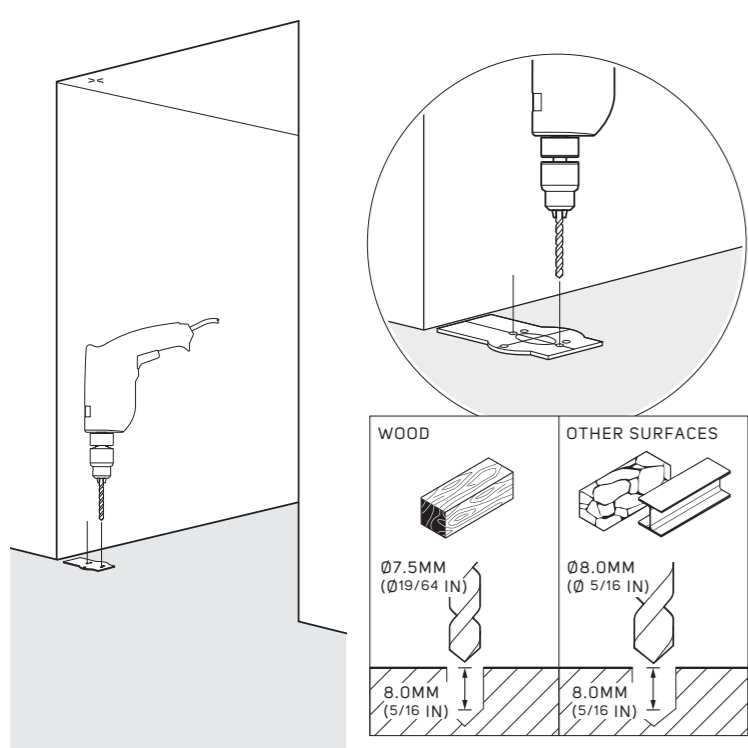


4

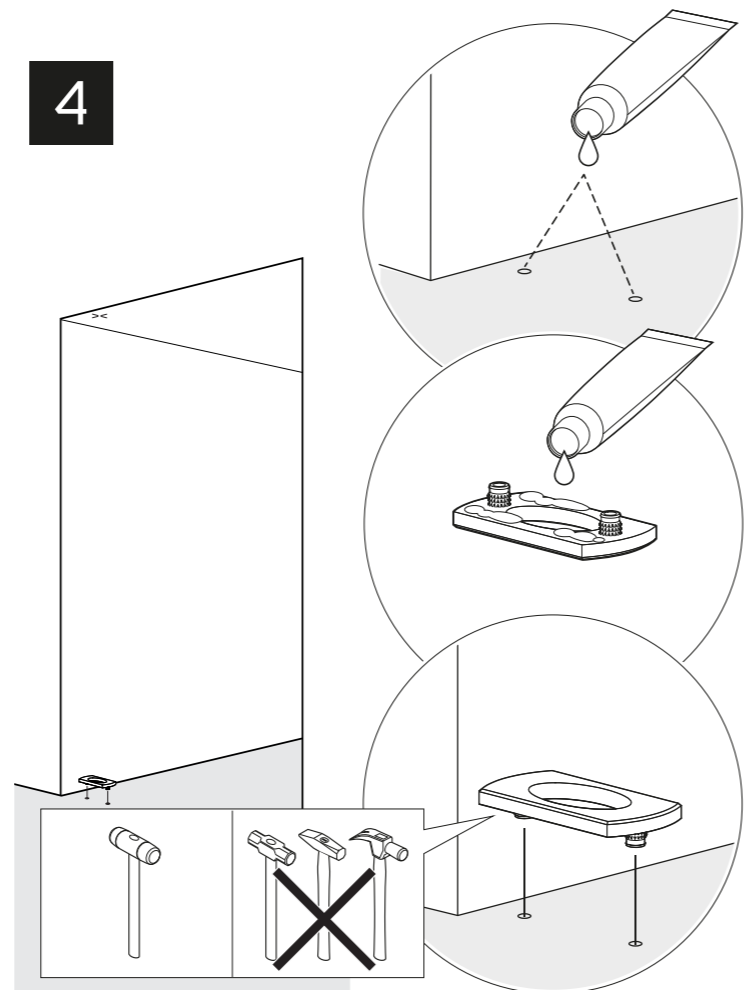


5 MOUNT THE CEILING PLATE

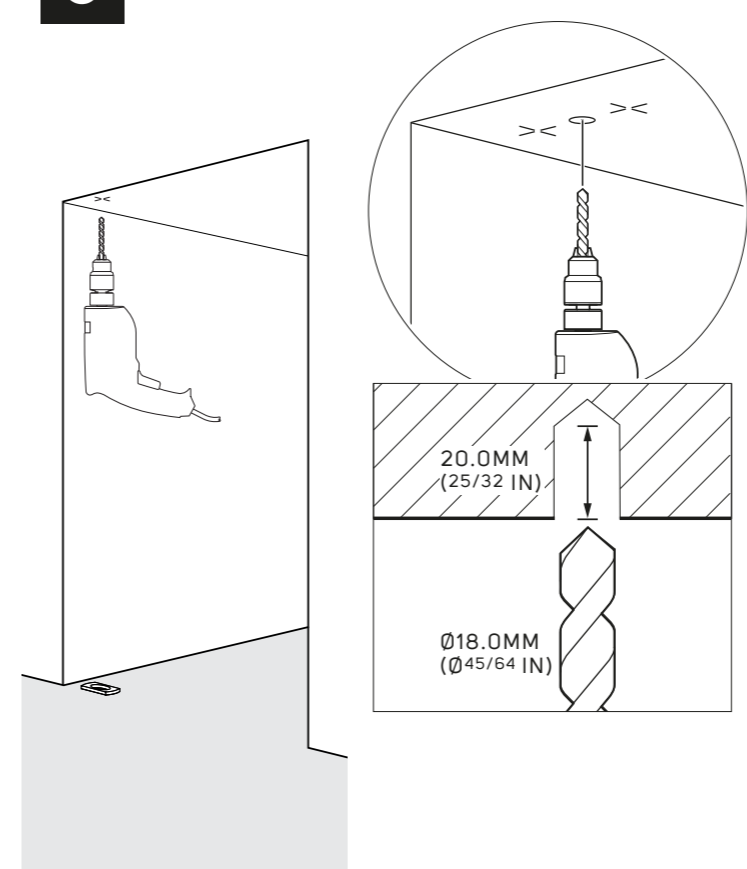


6

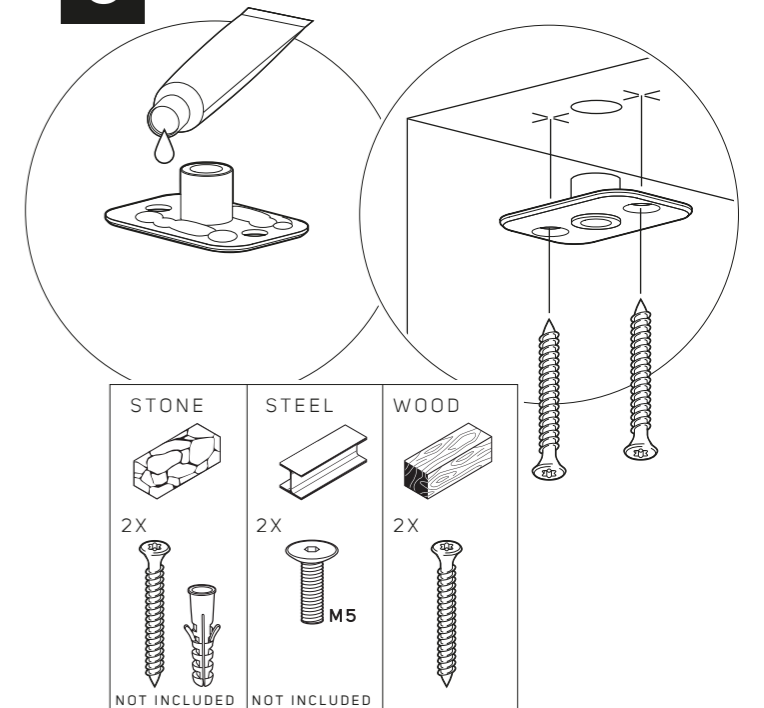


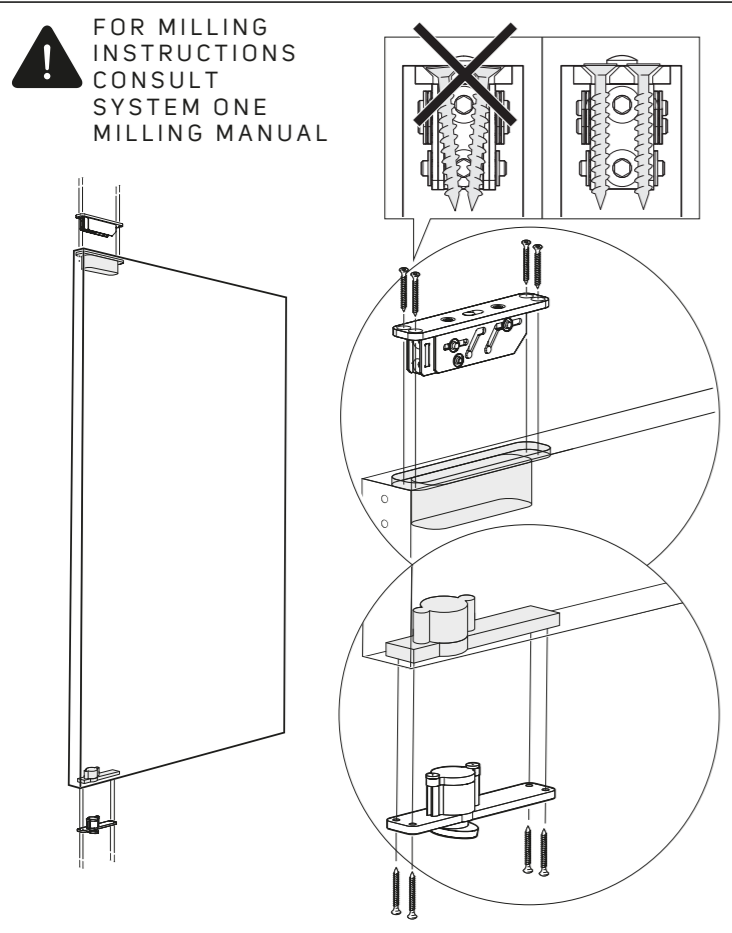

7 MOUNT THE DOOR

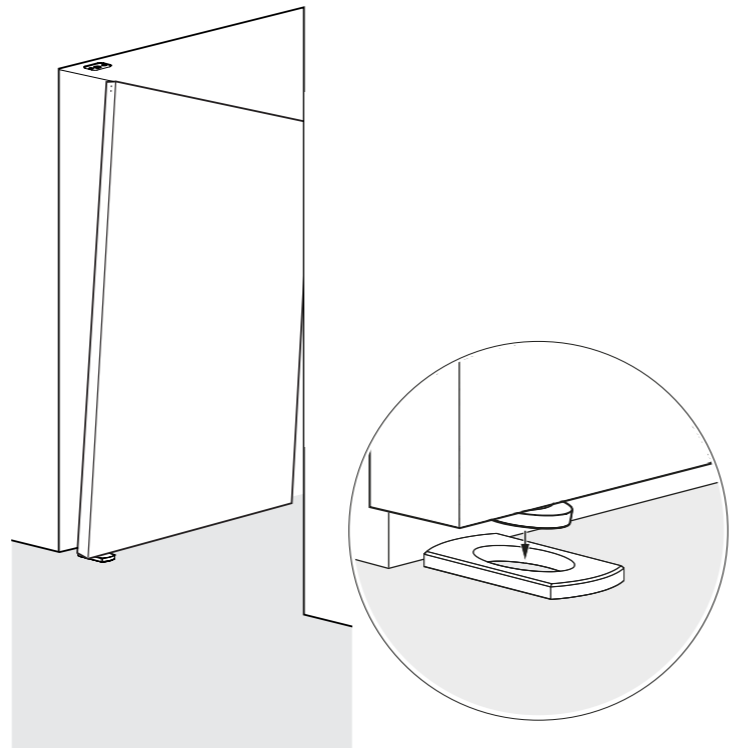

8

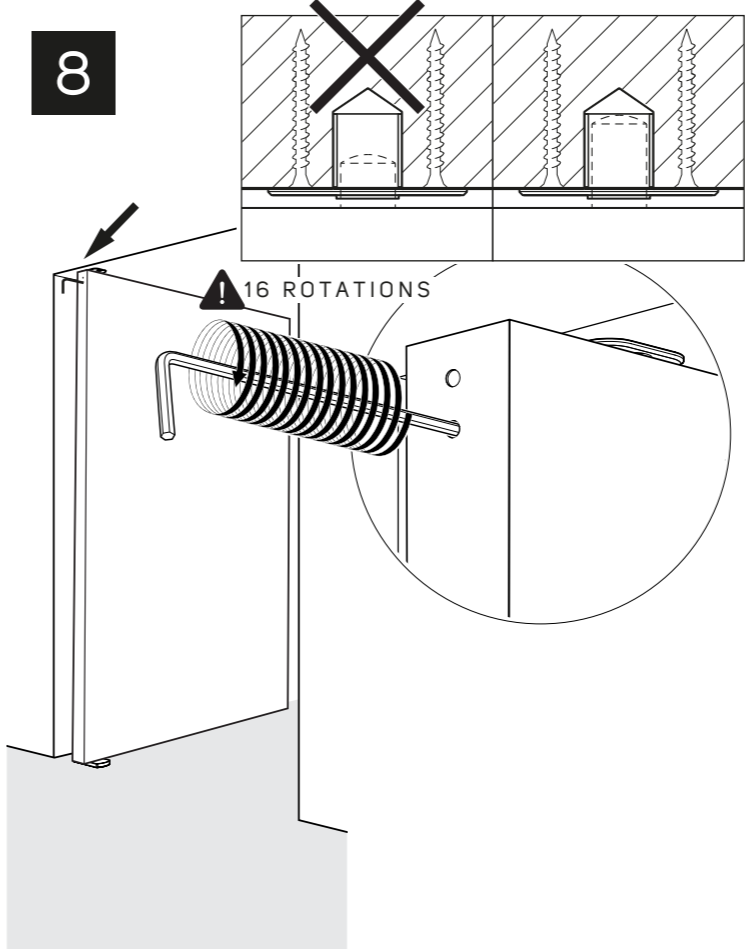

A FINETUNE THE CLOSING SEAM

